



# PROVEN PERFORMER


## Commercial Laundry

STGWYAJP303NN22 (Stack Washer/Dryer - gas)

STEWYAJP303NN22 (Stack Washer/Dryer - electric)

### Stack Washer/Dryer Features

- Improved suspension with new out-of-balance logic manages and redistributes unbalanced loads for uninterrupted wash cycles
- Water use as low as 51.78 litres per cycle to reduce operating costs
- Extended Tumble helps eliminate wrinkling by tumbling for two minutes at 20 minute intervals if the dryer door isn't opened
- Just like their stand-alone counterparts, Speed Queen stacks are 100 percent front serviceable to limit downtime for easy service access



STACKABLE  
UNIT



STANDARD STAINLESS  
STEEL WASHING DRUM



LARGE DOOR  
OPENING



LOW WATER  
CONSUMPTION



LOW ENERGY  
CONSUMPTION



COMPACT  
DESIGN



STGWYAJP303NN22  
STEWYAJP303NN22

	STGWYA JP303NN22 (Gas) / STEWYA JP303NN22 (EI.)	
GENERAL DETAILS		
Type	Stack Washer	Stack Dryer
Control	Electronic	Electronic
Control location	Front	Front
Actuation	Prep for Card	Prep for Card
DRUM		
Capacity	[kg]	10.5
Cylinder volume	[l]	96.8
DRUM SPEED		
G-Force		n/a
Spin speed	RPM	1200
MOTOR		
Motor power	[kW]	0.9
CABINET		
Cylinder finish	Stainless	Stainless
Colour	Stainless	Stainless
Door type (solid/window)	Solid	Solid
HEATING		
Heat source	Boiler Fed	Gas /Electric
Heating power	n/a	25000 BTU (G) / 4800 W (E)
CONNECTION		
Gas inlet connection	[mm]	9.5 (G) / n/a (E)
Exhaust outlet diameter	[mm]	102
Exhaust airflow	[l/sec]	105
Water inlet	["]	n/a
Water pressure	[Bar]	n/a
Pump Drain	[mm]	n/a
OPERATION		
Cycles	6	5
Water temperatures	3	n/a
Water consumption per cycle litres*	51.78	n/a
Cycle indicator lights	Yes	
POWER		
Electrical requirements	[V/Hz/Phase]	220-240/50/1
TRANSPORT DATA		
Net weight	[kg]	175
Shipping weight	[kg]	189
Dimensions H×W×D	[mm]	1986×683×704
Packing dimensions H×W×D	[mm]	2032×864×762
Volume	[m³]	1.34


\* Based on DOE test procedure



Dimensions

Stack Washer/Dryer – gas

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
STGWYAJP303NN22 STEWYAJP303NN22	1678*	1447*	597	213	610	203	391	59	938*	368*	1140*	813*	683	1184*	1986*	52	704	38

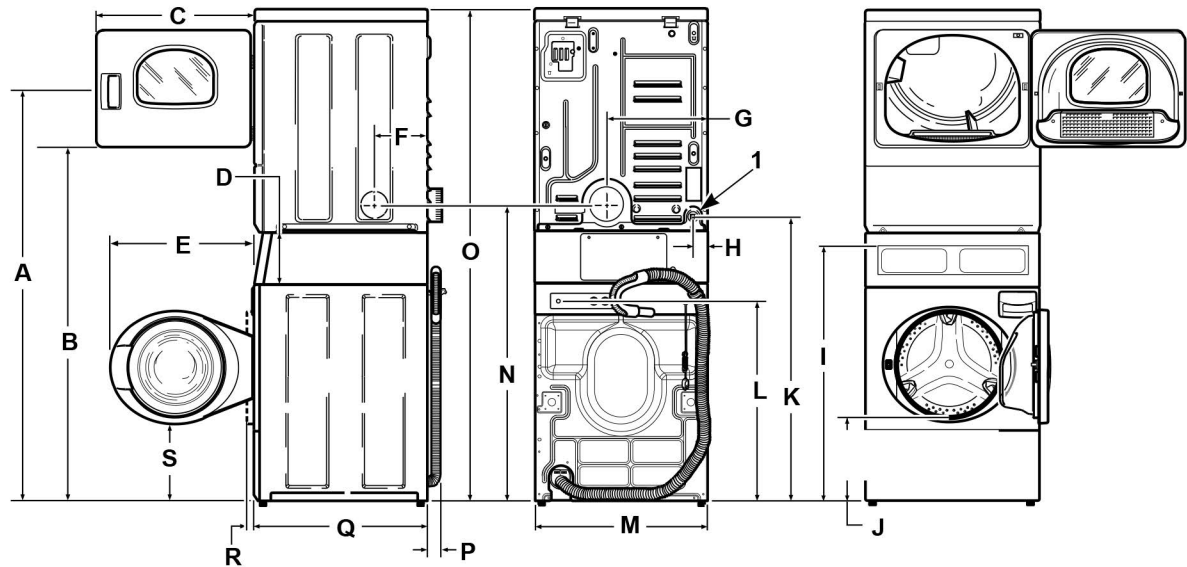

All measurements are in mm. \*With levelling legs turned into base.

NOTE: Exhaust openings are 102 mm metal ducting.



