



Maximum Performance



UH180, UH240, UH280

FEATURES AND BENEFITS

- Freestanding, high spin
- Complete stainless steel cabinet
- Stainless steel drum and tub
- Patented soap hopper
- Large drain valve (Ø 76 mm)
- Easy access to all important parts from all sides
- Large door opening for easy loading & unloading
- Automatic door positioning
- Liquid soaps connection
- Weighing system by 4 cells

OPTIONS


- USB plug (on the side panel)
- Liquid soap pumps
- Water recovery option incl. second drain valve
- Steam heating version
- Water sample tap
- Second display
- Automatic weighing system through 4 weighing cells
- Tilting system : assists operators during loading & unloading

CONTROL

- UniLinc Touch
 - 7" full color touch screen display with swipe function: very intuitive for users
 - user-friendly screen with operating instructions built in as part of the control
 - Complete control content available in 34 languages
 - 20 standard wash programmes, total memory capacity for 99 programmes
 - Automated service reminders remind users to maintenance tasks
 - Water leak detection
 - Slow drain detection
 - Temperature-time verification

HIGH SPIN HYGIENIC BARRIER WASHERS

TYPE		UH180	UH240	UH280
CAPACITY				
Drum capacity 1:10	kg/lb	18/40	24/55	28/65
Drum capacity 1:9	kg/lb	20/44	27/60	31/68
Drum volume	l	180	240	280
Drum diameter	Ø mm	750	750	750
Number of drums		1	1	1
Number of loading doors		1	1	1
Number of unloading doors		1	1	1
DRUM SPEED				
Wash	rpm	42	42	42
Extraction	rpm	939	939	914
G-Factor		370	370	350
CABINET				
Stainless steel		Standard	Standard	Standard
HEATING				
Electricity (standard)	kW	12/18	18	18/21.9
Steam	bar	3-8	1-8	3-8
CONNECTIONS				
Electrical		STD: (C)380-415/50/60/3 OPT-NC: (Q)200-240/50/60/3 - (X)200-240/50/60/1 (only available for boiler fed and steam heating) - (P)380-415/50/60/3-(N)440-480/50/60/3		
Water inlet	inch	STD: 3 x 3/4" OPT-NC: 2 x 3/4"	STD: 3 x 3/4" OPT-NC: 2 x 3/4"	STD: 3 x 3/4" OPT-NC: 2 x 3/4"
Steam inlet	inch	13 (1/2")	13 (1/2")	13 (1/2")
DIMENSIONS				
HxWxD	mm	1455x900x1145	1455x1020x1145	1455x1130x1145
TRANSPORT DATA				
Gross	kg	485	515	550
Net	kg	430	460	490
Packed HxWxD	mm	1610x1010x1235	1610x1130x1235	1610x1240x1235

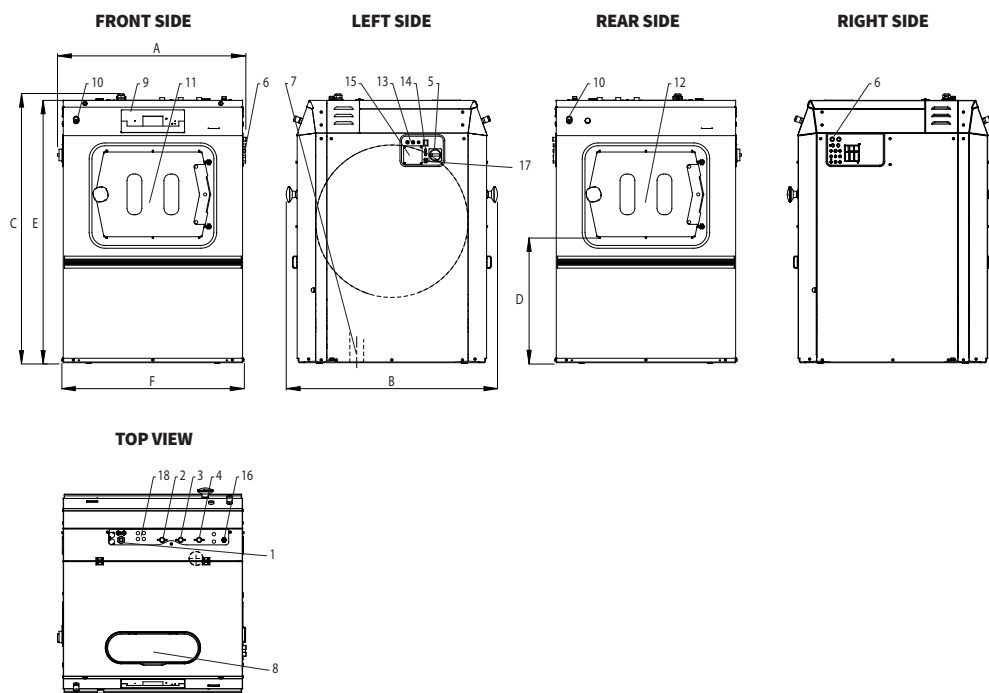

1. Electrical connection
2. Hot water
3. Cold water hard
4. Cold water soft
5. Main switch
6. Liquid soap connection
7. Drain
8. Soap dispenser
9. Control panel
10. Button CENTRALSTOP
11. Loading door
12. Unloading door
13. Fuses
14. USB port
15. Electrical connection to liquid soap pumps
16. Steam supply
17. PROform assist connection (RS485)
18. External lubrication system

DIMENSIONS

TYPE	A	B	C	D	E	F
UH180	900	1145	1455	655	1423	850
UH240	1020	1145	1455	675	1423	970
UH280	1130	1145	1455	670	1423	1080
	width	depth	height			

DOOR DIMENSIONS

TYPE	WIDTH	WIDTH
UH180	325	376
UH240	325	496
UH280	325	496

TO LEARN MORE, OR TO FIND A DISTRIBUTOR IN YOUR AREA, VISIT UNIMAC.COM
ALLIANCE LAUNDRY SYSTEMS - SHEPARD ST, RIPON WI 54971 - +1 800 587 5458

Consult your UniMac® distributor for details. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems® Ripon facility has been registered to ISO 9001:2008.

©2023 Alliance Laundry Systems LLC.

UniMac® by Alliance Laundry Systems