

## **UA332-520**


## **FEATURES AND BENEFITS**

- Rigid mounted, normal spin
- Stainless steel panels
- Stainless steel drum and tub
- PROform fully programmable microprocessor
- Patented soap hopper
- High capacity water inlets
- Large drain valves (2 x Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading

## **OPTIONS**

- •
- USB plug (on the back panel)
- · Liquid soap connection
- Steam heating version
- Liquid soap pumps
- · Water recovery kit
- 3rd water inlet
- ECO version: lower kW rating on request

ТҮРЕ		UA332	UA520					
INNERDRUM								
Capacity (1:10)	kg	33	52					
Capacity (1:9)	kg	37	58					
Volume	l	332	520					
Diameter	mm	914	914					
DRUM SPEED								
Wash	rpm	38	38					
Extraction	rpm	440	440					
G-Factor	G	150	100					
HEATING								
Electricity	kW	27	40,6					
Steam	bar	1-8	1-8					
Hot water	°C	90	90					
Sound pressure level	dB (A)	<65	<65					
Water valves connection	inch	3/4"	3/4″					
Water pressure	kPa	100-800	100-800					
Rec. water pressure	kPa	300-500	300-500					
Water inlet	l/min	66-188	183-518					
Drain valve	outer Ø mm	2 x 76	2 x 76					
Flow amount with drain valve	l/min	2 x 210	2 x 210					
Steam valve connection	inch	3/4"	3/4"					
Steam pressure	kPa	100-800	100-800					
TRANSPORT DATA								
Gross weight	kg	450	570					
Net weight	kg	410	520					
Packed HxWxD	mm	1625 x 1088 x 1060	1625 x 1088 x 1345					

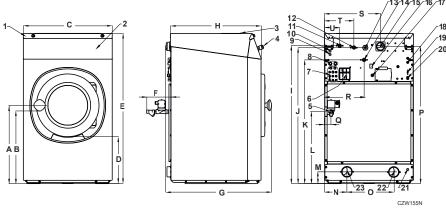

- 1. Hidden PC Connection
- Control panel
  Soap dispenser
- 4. Central stop button
- 5. Steam connection
- 6. Air relieve
- 7. Liquid soap connection
- 8. Recyled water inlet
- 9. Steam valve connection10. Recycled water valve cable inlet11. Cold water inlet, soft
- 12. Cold water inlet, hard
- 13. Electrical connection
- 14. Hot water inlet
- 15. Main switch
- 16. Heating change-over switch
- 17. Liquid soap pump electrical connection
- 18. Fuses
- 19. USB port

- 20. PC programming connection 21. Discharge water cable inlet 22. Drain valve or recycle valve 3in/76mm
- 23. Drain valve 3 in/76mm

TYPE	A	В	C	D	E	F	G	н	ı	J	K	L	M	N	0	P	Q	S	T
UA 332	1060	1030	1500	936	465	318	120	1326	1366	113	248	383	671	1349	1413	528	66	145	482
UA 520	1060	1315	1500	1221	465	318	120	1414	1374	88	223	363	671	1349	1332	528	66	145	482
	width	depth	height																